

2014 Catalog PNEUMATIC TOOLS & ACCESSORIES

www.green-air.com





ISO 9001:2000



COMPANY PROFILE

Green Power Hardware Tools Group is one of the largest professional manufacturer and exporter of Pneumatic Tools and Accessories in China. Established by Taiwanese investors in 1992, we can look back on more than 30 years of professional manufacturing and sales experience with clients and connections worldwide.

The main manufacturing facility is located in Fuzhou, Fujian, with over 400 current employees. The facility covers an area of more than 70,000 square meters, with a construction area of over 35,000square meters. There is anadditional manufacturing and trading subsidiary in Shanghai, as well as Tainan Taiwan under Green Power Hardware Tools Group.

Green Power Hardware Tools Group has been devoting itself to supplying the most reliable and consistent quality of Pneumatic Products to customers both domestically and internationally. Our main product category includes PneumaticTools, Paint Spray Guns, Air Hoses&Hose Reels, and a wide range of Air Accessories. The total turnover of the company in 2012 was over forty million US dollars.

The company enjoys an excellent reputation on engineering innovation, top-level management standardization as well as start to finish quality control. The company and its products have passed the approval of *ISO9001* quality system, the *GS*, *CE*, product patents, and many other international quality certifications.

Our registered brand names"*GREEN*', "*FAN*" and "*GREEN POWER*' have become the most popular and leading brands indomestic markets.









CONTENTS

Air Hose & Air Hose Reel	01
Air Spray Gun	04
Air Tool	07
Air Accessory	17



www.green-dir.com GREEN GREEN AIR TOOL




Retractable Air Hose Reel HR-808 HR2-309 HR2-815 HR3-315


- Half enclosed design version
- Compact case design suited to work bench applications
- Automatic hose reel. Ratchet or free-running operation
- High quality special PP material durable construction, lightweight and corrosion resistant design
- Supplied with wall/ceiling mounting brackets
- Supply PU, PVC Hose

Retractable Air Hose Reel HR4-315 HR5-315 HR5-309

- · Enclosed design version
- Compact case design suited to work bench applications
- Automatic hose reel. Ratchet or free-running operation
- High quality special PP material durable construction,
- lightweight and corrosion resistant design · Supplied with wall/ceiling mounting brackets
- Supply PU, PVC Hose



Wall



Retractable Air Hose Reel HP-315 HP-308

- · Retractable design allows automatic rewind of air hose
- Durable composite drum with firm steel side support mounting bracket provides durability
- Guide adjusts to 45 degrees enabling easy use when mounted to bench or wall
- Hose guide uses a 4-roller design to help reduce hose wear
- Mounts easily to workbench or wall

Model	Inlet/Outlet	Hose Size I.D. x Length	Hose Type	Max. Pressure	Fluid	Lead-in Hose Length	Packing (QTY/N.W/G.W/VOL.)
	in	in x ft		psi		ft	pcs/kg/kg/cuft
HR-808	1/4 / 1/4	5/16 x 26	PU	250	Air	1.5	6/18.0/19.0/3.15
HR2-309	1/4 / 1/4	3/8 x 30	PVC	300	Air	1.5	4/18.0/20.0/2.84
HR2-815	1/4 / 1/4	5/16 x 50	PU	250	Air	1.5	4/18.0/20.0/2.84
HR3-315	1/4 / 1/4	3/8 x 50	PVC	300	Air	1.5	1/6.4/7.5/1.32
HR4-309	1/4 / 1/4	3/8 x 30	PVC	300	Air	1.5	4/18.0/20.0/2.84
HR4-315	1/4 / 1/4	3/8 x 50	PVC	300	Air	1.5	2/28.5/30.0/2.4
HR5-315	1/4 / 1/4	3/8 x 50	PVC	300	Air	1.5	1/7.0/7.5/1.43
HR5-309	1/4 / 1/4	3/8 x 30	PVC	300	Air	1.5	1/7.0/7.5/1.43
HP-315	1/4 / 1/4	3/8 x 50	PVC	300	Air	3.0	2/14.0/16.0/1.69
HP-308	1/4 / 1/4	3/8 x 25	PVC	300	Air	3.0	2/14.0/16.0/1.69

Retractable Metal Air Hose Reel HA-4015 HA-4615 HL-4015 HL-4615S

- Retractable design allows automatic rewind of air hose
- Heavy duty reinforced steel construction with paint coatingStrong reel supported on both/single side by pedestal style
- base and arm guide
- Four roller non-snag hose guides reduce wear
- Spring protector keeps hose against damage when pulled and stretched
- · Mounts easily to workbench or wall

Manual Air Hose Reel HD-220

- Open version. Max. capacity 1/4"x100ft. hose
- Durable composite drum on electroplate aluminum stand
- Model feature drum brakes to promote a safe tidy working environment
- Can be used mobile or permanently installed

Manual Air Hose Reel HV-315 HV-215 HC-215

- Open version. Max. capacity 3/8"x100ft. hose
- · Heavy duty reinforced steel construction with paint coating.
- Swivel style handle pivots in hand for winding ease.
- Bend restrictor prolongs the life of the air hose
- Mounting bracket-Mount reel to wall, workbench or vehicle with ease.
- Heavy duty 1/4" brass swivel. Spring protector keeps hose against damage when pulled and stretched
- Easy access inlet connection
- Mounting Style: Wall mount, Bench mount, Truck mount

Manual Air Hose Reel HU-330

- Open version. Max. capacity 3/8"x200ft. hose
- · Heavy duty reinforced steel construction with paint coating.
- Swivel style handle pivots in hand for winding ease.
- Bend restrictor prolongs the life of the air hose
- Mounting bracket-Mount reel to wall, workbench or vehicle with ease.
- Heavy duty 1/4" brass swivel.
- Spring protector keeps hose against damage when pulled and stretched
- Easy access inlet connection
- Mounting Style: Wall mount, Bench mount, Truck mount



Model	Inlet/Outlet	Hose Size I.D. x Length	Hose Type	Max. Pressure	Eluid	Lead-in Hose Length	Packing (QTY/N.W/G.W/VOL.)
	in	in x ft		psi		ft	pcs/kg/kg/cuft
HA-4015	1/4 / 1/4	3/8 x 50	PVC / Rubber	300	Air,Water,Oil	3.0	1/12.5/13.5/1.57
HA-4615	3/8 / 3/8	1/2 x 50	PVC / Rubber	300	Air,Water,Oil	3.0	1/15.0/15.5/1.87
HL-4015	1/4 / 1/4	3/8 x 50	PVC / Rubber	300	Air,Water,Oil	3.0	1/11.5/12.5/1.57
HL-4615	3/8 / 3/8	1/2 x 50	PVC / Rubber	300	Air,Water,Oil	3.0	1/14.0/14.5/1.87
HD-220	1/4 / 1/4	1/4 x 60	PVC	300	Air	5.4	4/11.3/13.3/3.23
HV-315	1/4 / 1/4	3/8 x 50	PVC	300	Air	3.0	1/7.2/8.0/1.66
HV-215	1/4 / 1/4	3/8 x 50	PVC	300	Air	3.0	1/4.7/5.5/1.00
HC-215	1/4 / 1/4	3/8 x 50	PVC	300	Air	3.0	1/8.0/8.5/1.21
HU-330	1/4 / 1/4	3/8 x 100	PVC	300	Air	3.0	1/9.6/10.6/1.79



HV-215/315

www.green-air.com

TOOL

GREEN

HA-4015/4615

HD-220





AIR HOSE REELS



2



www.green-dir.com











Flexible Rubber/PVC Hybrid Air Hose

- Kink resistant under pressure
- Extreme all-weather flexibility, even in sub-zero temperatures (-10°F to 150°F)
- Maximum working pressure: 300 PSI
- Excellent abrasion-resistant outer cover; includes bend restrictor that reduces wear and tear, prolonging the life of the hose
- Size available: 1/4", 3/8", 1/2"; One-piece length 25, 50, 100ft available, etc.
- Assembly with fittings is available

PU Braided Air Hose

- Very lightweight and flexible
- · Good flex feature and resilience characteristics
- Excellent resistance to oils and solvents
- Superior cut-resistance
- High abrasion-resistance, provides extra long life compared with conventional PVC or rubber air hose
- · Good resistance to hydrolysis and algae in warm water applications
- Size available: 1/4", 5/16", 3/8", 1/2", etc.
- 200 or 250PSI working pressure, 3:1 Safety rate
- One-piece length 25, 50, 100ft. available, assembly with fittings is available
- Service temperature range from -30°F to 130°F

PVC Air Hose

- Economical, light weight, Low temperature alternative to rubber hose
- Excellent abrasion resistance
- 250 or 300PSI working pressure, 4:1 Safety rate
- Service Temperature Range: 0°F to 130°F
- Size available: 1/4", 3/8", 1/2"; One-piece length 25, 50, 100ft available, etc.
- Assembly with fittings is available

Rubber Air Hose

- Wide range service in general industrial services, automobiles shop, pneumatic tools, etc.
- Oil & Abrasion resistant
- Extended life over PVC, superior durability
- Increased flexibility in cold temperatures
- 300PSI working pressure, 3:1 Safety rate
- Service Temperature Range: -60°F to 150°F
- Size available: 3/8", 1/2"; One-piece length 25, 50, 100ft. available, etc.
- Assembly with fittings is available

1/4" Nylon/PU Recoil Air Hose

- The self storing air hose snaps back into shape just like a telephone cord
- · Comes with end fittings and spring guards to prevent restricted air flow
- 200 PSI working pressure

3

www.green-air.com





General Purpose Spray Gun

· Easily changes from siphon to pressure-feed with the twist of a knob for use with a variety of materials

PQ-01

PW-01

W-97

W-98-G

- Pattern control adjusts fan size for better results
- · Convertible from non-bleeder to bleeder style for use with standard or tankless air compressors
- · Works with paint tanks and remote canisters

Touch Up Spray Gun

ISO 9001:2000 (E

- Provides full size pattern in a small package
- Nickel plated body provides easy clean-up
- Features both fluid and pattern controls
- Includes 200cc canister

Siphon Feed Spray Gun

- · Superbly balanced spray gun suitable for applying finishing coats
- Pattern/Material/Air adjustment controls
- Includes 1,000cc anti-drip canister

HVLP Gravity Feed Spray Gun W-98-V

- High volume, low pressure design in high transfer efficiency to save paint up to 25%, reduce overshot and protect environment
- · Perfect atomization used for auto and particle size
- · Filter removes dirt particles from paint preventing defects
- Pattern/Material/Air adjustment controls
- 600cc plastic cup allows viewing of paint fluid level

Gravity Feed Spray Gun

- · Stainless fluid needle and nozzle are compatible with today's advanced coatings
- Perfect atomization used for auto and particle size.
- Filter removes dirt particles from paint preventing defects.
- Pattern/Material/Air adjustment controls.
- 600cc plastic cup allows viewing of paint fluid level

Air Texture Hopper Spray Gun PT-03

- Ideal for holding acoustic material textured paint/water-proof mat.
- Includes 1.25gal(U.S.) plastic cup

Specifications:

Model	Type of Feed	Fluid tip	Canister Capacity	Air Con. @ 40psi	Air Pressure	Net Weight	Air Inlet	Fluid Inlet	Packing (QTY/N.W/G.W/VOL.)
	in	mm	сс	cfm	psi	kg	in	in	pcs/kg/kg/cuft
PQ-01	Suction	1.8	1000	8.0	45	1.0	1/4	3/8	10/8.0/9.0/2.23
PW-01	Suction	1.8	200	4.5	45	0.5	1/4	1/4	24/11.0/14.5/1.55
W-97	Suction	1.8	1000	10	50	1.2	1/4	3/8	10/13.0/14.0/2.14
W-98-V	Gravity	1.4,1.7,2.2	600	4.3	25	0.6	1/4	/	10/10.0/11.0/1.33
W-98-G	Gravity	1.4,1.7,2.2	600	6.3	30-50	0.6	1/4	/	10/10.0/11.0/1.33
PT-03	Gravity	1.6	4800	8.0	60	1.1	1/4	/	4/7.0/8.0/1.05









PW-01







www.green-air.com GREEN AIR TOOLS

F-2

W-871

SGK-29



W-71-G



W-71-S



W-77-S

W-871

SGK-29

Siphon/Gravity Feed Spray Gun W-71-S W-71-G

- Mainly used for spray-painting medium and highly adhesive, surface such as car, furniture, machinery, etc.
- Pattern/Material/Air adjustment controls
- Includes 600cc paint canister(Model No. W-71-S); 400cc paint cup(Model No. W-71-G)

Siphon/Gravity Feed Spray Gun W-77-S W-77-G

- Mainly used for spray-painting medium and highly adhesive, surface such as car, furniture, machinery, etc.
- Pattern/Material/Air adjustment controls
- Includes 1000cc paint canister(Model No. W-77-S); 400cc paint cup(Model No. W-77-G)

Mini Gravity Feed Spray Gun

- · Mainly used for spray-painting drawing, toys and handicraft
- Pattern/Material adjustment controls
- Includes 200cc paint cup

Pressure Feed Spray Gun

- This gun is mainly used for interior or exterior walling painting, using high gloss paint
- Pattern/Material/ adjustment controls
- Includes 1,000cc pressure paint canister

29PC. Spray Gun Kit

- Ideal for Painting Furniture, T-Shirts and Craft Projects.
- CONTENTS:
- 1-Suction Feed Spray Gun with 26 oz. Cup, 1-Wrench, 8-Air Brush Kit, 1-1.5mm Needle,
- 1-1.5mm Air Cap, 1-1.5mm Fluid Tip, 10-Paper Paint Strainers, 3-Cleaning Brush
- 1-Plastic Handle Cleaning Brush, 1-Straight Wire Cleaner, 1-1/4"F NPT Industrial Plug
- **CLAMSHELL PACKAGING Packing: 6pcs/6.0kg/7.0kg/10.55'

Specifications:

Model	Type of Feed	Fluid tip	Canister Capacity	Air Con. @ 40psi	Air Pressure	Air Inlet	Fluid Inlet	Packing (QTY/N.W/G.W/VOL.)
	in	mm	cc	cfm	psi	in	in	pcs/kg/kg/cuft
W-71-S	Suction	1.0,1.3,1.5,1.8	600	3.2	40-60	1/4	1/4	10/10.0/11.5/1.32
W-71-G	Gravity	1.0,1.3,1.5,1.8	400	3.2	40-60	1/4	1/4	10/9.0/10.0/1.31
W-77-S	Suction	1.5,2.0,2.5	1000	4.2	50-70	1/4	3/8	10/12.0/13.5/1.73
W-77-G	Gravity	1.5,2.0,2.5	400	4.2	50-70	1/4	3/8	10/10.0/11.0/1.42
F-2	Gravity	0.5	200	2.2	35	1/4	1/4	20/9.0/10.0/1.45
W-871	Pressure	2.5	1000	10.0	45	1/4	1/4	10/14.0/15.0/2.00





W-77-G



5

1" Heavy-duty Air Impact Wrench F312-1380/1380S

- Pin-less built-in mechanism
- At 3,200 ft-lb. of torque, provides the power to remove and replace fasteners on truck, buses and heavy equipment
- Adjustable air regulator and speed control
- 8" anvil for extended reach into deep tire well
- 3" anvil available upon request (Model No. F312-1380S)
- Auxiliary handle for easy operation

1" Heavy-duty Air Impact Wrench F312-1100

- · Pin-less built-in mechanism
- At 2,500 ft-lb. of torque, provides the power to remove and replace fasteners on truck, buses and heavy equipment
- Adjustable air regulator and speed control
- 8" anvil for extended reach into deep tire well
- Auxiliary handle for easy operation

1" Heavy-duty Air Impact Wrench F312-1690

- · Pin-less built-in mechanism
- At 3,200 ft-lb. of torque, provides the power to remove and replace fasteners on truck, buses and heavy equipment
- · Adjustable air regulator and speed control
- 8" anvil for extended reach into deep tire well
- Auxiliary handle for easy operation

1" Heavy-duty Air Impact Wrench F312-1680

- Pin-less built-in mechanism
- At 3,000 ft-lb. of torque, provides the power to remove and replace fasteners on truck, buses and heavy equipment
- Adjustable air regulator and speed control
- 8" anvil for extended reach into deep tire well
- Auxiliary handle for easy operation

1" Heavy-duty Air Impact Wrench F312-1580

- · Pin-less built-in mechanism
- At 2,800 ft-lb. of torque, provides the power to remove and replace fasteners on truck, buses and heavy equipment
- Adjustable air regulator and speed control
- 8" anvil for extended reach into deep tire well
- Auxiliary handle for easy operation



Model	Drive Size	Free Speed	Max. Torque	Average Air Cons.	Air Pressure	Net Weight	Air Inlet	Min. Hose size	Packing (QTY/N.W/G.W/VOL.)
	in	rpm	ft.lbs	cfm	psi	kg	in	in	pcs/kg/kg/cuft
F312-1380	1	3500	3200	12	90	15.0	1/2	1/2	2/30.0/31.0/1.74
F312-1100	1	3000	2500	13	90	14.8	1/2	1/2	2/30.0/31.0/1.74
F312-1690	1	3500	3200	13	90	15.0	1/2	1/2	2/30.0/31.0/1.74
F312-1680	1	3800	3000	13	90	15.0	1/2	1/2	2/30.0/31.0/1.74
F312-1580	1	4000	2800	13	90	15.0	1/2	1/2	2/30.0/31.0/1.74

F312-1100

F312-1690

F312-1680

F312-1580

312-1380S

F312-1380

w.green-air.com

REE

AIR TOOLS

6



ISO 9001:2000 (E 🔂

1/2" Air Impact Wrench

F312-24/26

F56

· Rocking dog mechanism

www.green-air.com

- At 240 ft-lb. of torque, provides power to remove most lug nuts
- Built-in power regulator to control speed and torque
- Single handed operation for forward and reverse direction changes
- · Four position power settings

1/2" Heavy Duty Air Impact Wrench F323-48/58

- Twin hammer mechanism
- At 480 ft-lb. of torque,8500 rpm free speed, provides power to remove most lug nuts
- · In-handle exhaust directs air away from the operator
- One single switch that controls air flow adjustment and reversing exchange allows simpler and more convenient operation
- Three position power settings
- F323-58 Reinforced steel front housing for longer use life.

1/2" Heavy Duty Air Impact Wrench F323-45

- Pin clutch mechanism
- At 450 ft-lb. of torque, 8500 rpm free speed, provides power to remove most lug nuts
- · In-handle exhaust directs air away from the operator
- One single switch that controls air flow adjustment and reversing
- exchange allows simpler and more convenient operationThree position power settings

1/2" Air Impact Wrench

• Twin hammer mechanism

- Suitable for tyre setting work of light & psssenger vehicle and used for wide range of applications at automoive maintenance shops and tyre shop
- · Reinforced steel front housing for longer use life
- Five position power settings
- · Professional quality

1/2" Heavy Duty Air Impact Wrench **F57/F86**

- Twin hammer mechanism
- Suitable for tyre setting work of light & psssenger vehicle and used for wide range of applications at automoive maintenance shops and tyre shop
- · Reinforced steel front housing for longer use life
- Five position power settings
- Professional quality

Specifications:

Model	Drive Size	Free Speed	Max. Torque	Average Air Cons.	Air Pressure	Net Weight	Air Inlet	Min. Hose size	Packing (QTY/N.W/G.W/VOL.)
	in	rpm	ft.lbs	cfm	psi	kg	in	in	pcs/kg/kg/cuft
F312-24/26	1/2	7000	240	3.6	90	2.18	1/4	3/8	10/25.0/26.0/1.38
F323-48/58	1/2	8500	480	4.2	90	2.45	1/4	3/8	10/28.0/29.0/1.40
F323-45	1/2	8500	450	4.2	90	2.45	1/4	3/8	10/28.0/29.0/1.40
F56	1/2	8000	460	4.2	90	2.50	1/4	3/8	10/29.0/30.0/1.40
F57	1/2	8000	720	4.5	90	2.80	1/4	3/8	10/30.0/31.0/1.40
F86	1/2	7000	850	4.8	90	2.95	1/4	3/8	10/31.0/32.0/1.40



GREEN/

F323-48

F323-45

F57



F86

F312-26

GREEN

Air Die Grinder

F313-324 F313-325

- At 25,000 rpm, provides the speed to remove material quickly
- Complete with 1/4" or 6mm collet
- Built-in regulator to match speed to the job
- Front exhaust design for model #F313-324, Rear exhaust design for model #F313-325

Air Die Grinder

F313-326

- At 22,000 rpm, provides the speed to remove material quickly
- Complete with 1/4" or 6mm collet
- Built-in regulator to match speed to the job
- Safety trigger prevents inadvertent operation
- Rear exhaust design

Air Angle Die Grinder

F313-323

- Angle head provides easy access into tight space
- Ideal for grinding, edge-breaking, deburring, porting and polishing
- Built-in regulator to match speed to the job
- Safety trigger prevents inadvertent operation
- Rear exhaust design

Air Hammer

F319-115/119/250

- Ideal for muffler and pipe removal, body shop work, shock work, scraping rust, and light front-end work
- Alloyed steel barrel and heat-treated piston for longer life
- Built in regulator to match speed to the job
- Adjustable air regulator and speed control
- Four round chisels-Include ripper, bolt cutter, flat and tapered punch chisels

Air Grease Gun

F327-11

- · Lubricates autos, recreational vehicles, machinery, lawn mowers and farm equipment
- Forces grease into fittings with far more power than manual gun
- Trigger-release design makes it easier to reach recessed or hard-to-get-at fittings
- Can be loaded three ways: 14 oz.cartridges, pressure filler or bulk load
- Optional 12" Flexible Steel or Nylon Extension Tube

Specifications:

Model	Collet Size	Free Speed	Average Air Cons.	Air Pressure	Net Weight	Air Inlet	Min. Hose size	Packing (QTY/N.W/G.W/VOL.)
	in	rpm	cfm	psi	kg	in	in	pcs/kg/kg/cuft
F313-324	1/4	25000	3.0	90	0.30	1/4	3/8	20/8.0/9.0/0.36
F313-325	1/4	25000	3.0	90	0.35	1/4	3/8	20/9.0/10.0/0.42
F313-326	1/4	22000	4.0	90	0.55	1/4	3/8	20/15.0/16.0/0.57
F313-323	1/4	22000	4.0	90	0.65	1/4	3/8	25/13.0/14.0/0.58

М	lodel	Stroke Length	Blows Per Minute	Chisel Shank	Average Air Cons.	Air Pressure	Net Weight	Air Inlet	Min. Hose size	Packing (QTY/N.W/G.W/VOL.)
		in	rpm	in	cfm	psi	kg	in	in	pcs/kg/kg/cuft
F3 ⁻	19-115	1-5/8	4500	0.401	5.0	90	1.5	1/4	3/8	10/15.0/16.0/0.75
F3 ⁻	19-119	2-5/8	3500	0.401	6.0	90	2.0	1/4	3/8	10/17.0/18.0/0.85
F3 ²	19-250	3-5/8	2200	0.401	6.0	90	2.2	1/4	3/8	10/18.0/19.0/0.95

Model	Operating Pressure	Delivery Pressure	Capacity	Average Air Cons.	Net Weight	Air Inlet	Min. Hose size	Packing (QTY/N.W/G.W/VOL.)
	psi	psi	oz	cfm	kg	in	in	pcs/kg/kg/cuft
F327-11	60-90	2400-3000	14.0	4.0	1.5	1/4	3/8	10/16.0/17.0/1.88



RBB

w.green-air.com











www.green-air.com GREEN

ISO 9001:2000 (E 🛒

Micro Die Grinder

At 30,000 rpms, this tool provides the speed necessary to perform detail grinding tasks.

- Tool comes equipped with an 1/8" collet that is compatible with most grinding accessories.
- Tool is the same size as a pencil and can be held as so for ultimate control during etching and grinding projects

Air Cut-off Tool

- At 22,000 rpm, provides the speed to cut tailpipes quickly and efficiently.
- Suitable for cutting car panel thickness material. Ideal also for cutting exhaust brackets
- Fitted with metal safety guard and throttle lever safety device to prevent accidental operation
- Rear exhaust directs air away from workpiece
- Built-in regulator to match speed to the job

3/8" Air Drill

- · Lightweight, compact size is easy to handle
- Suitable for drill metal, wood, aluminium, iron material
- · Provides full power in forward and reverse
- Handle exhaust reduces noise and directs air away from work
- Ball bearing constructon for long endurance

Screwdriver

• At 10,000 rpm and 40 ft-lbs of torque, can drive fasteners quickly and powerfully

- Removes and installs small fasteners in decks, lawn and garden and automotive applications
- Handle exhaust directs air away from the workpiece and operator
- Convenient forward/reverse valve
- Push To Start Type Chuck(F318-151) Quick Change Chuck(F318-152) 3/8" Hex. Drive(F318-153)

Air Ratchet Wrench

• An excellent tool for small engine repair, water pumps, headlight service work, bench and dashboard work

- · Compact head design allows greater flexibility in tight areas
- Easy to grip reverse lever for simple directional changes
- · Hardened gears allow greater durability over other economically priced ratchets
- 3/8" square drive (F320-23), 1/2" square drive (F320-24)

3/8" Butterfly Impact Wrench **GR-8115**

- 150 ft-lb. of maximum torque
- Rocking dog mechanism
- Butterfly throttle lever allows for quick directional change
- New sleek housing design features air inlet with screen increases maneuverability and reduces air hose tangles

Specifications:

Model	Collet Size	Free Speed	Average Air Cons.	Air Pressure	Net Weight	Air Inlet	Min. Hose size	Packing (QTY/N.W/G.W/VOL.)
	in	rpm	cfm	psi	kg	in	in	pcs/kg/kg/cuft
F313-13	1/8	30000	4.0	90	0.15	1/4	1/4	/
F313-330	3" Disc	22000	4.0	90	1.30	1/4	3/8	10/13.0/14.0/0.71
F318-131	3/8	1800	6.0	90	1.20	1/4	3/8	10/12.0/13.0/0.68
F318-151/152/15	3 1/4	10000	6.0	90	1.00	1/4	3/8	10/10.0/11.0/0.61

Model				Average Air Cons.				Min. Hose size	Packing (QTY/N.W/G.W/VOL.)
	in	rpm	ft.lbs	cfm	psi	kg	in	in	pcs/kg/kg/cuft
F320-23/24	3/8,1/2	160	45	4.0	90	1.2	1/4	3/8	20/25.0/26.0/0.71



GREEN/

F313-13





F318-151/152/153

F320-23/24

F313-13

F313-330

- F318-131

ISO 9001:2000 (E REE REE Siphon-Feed Sandblaster Set PT-05 · Easily removes rust, scale and paint • Draws abrasives from bucket or bag • Includes sandblast gun, hose, pick-up tube • Ceramic sandblast nozzle & air jet *Packing: 20pcs/26.0kg/27.0kg/4.01' **PT-05 Air Chiseler GR-8630** · Ideal for automaive maintenance & sheet metal works, for abruption & cutting works • Simple structure for less trouble • Compact, light weight and high power **GR-8630** Air Needle Scaler **GR-8635** • Ideal for automaive maintenance & sheet metal works, for various abruption works GR-8635 · High-speed, high-power & smooth operation • Compact, light weight and high power **Continuous Flow Grease Gun GR-68293** • This newly designed Grease Gun with ergonomic cushioned grip is great for maintaining trailers, boats, mowers, automobiles and RVs. · Continuous flow while trigger is depressed Heavy-duty spring and exclusive piston design • Uses 14-Ounce cartridge bulk filled or canister filled

/w.green-air.com

13PC. Impact Wrench Kit

W1-13K

- Ideal For Working On Your Car
- Contents: 1-1/2" Impact Wrench; 3-1/2" Drive Impact Sockets(12, 14, 17mm); 1-1/2" Dr.3" Ext. Bar; 3-Male Plugs; 1-Teflon Tape; 1-Air Blow Gun; 1-Air Tool Oil; 1-Dual Foot Tire Gauge; 1-Air Chuck

*Packing: 10pcs/32.0kg/33.0kg/1.25/

17PC. Impact Wrench Kit

- Ideal For Working On Your Car
- Contents: 1-1/2" Impact Wrench; 10-Sockets: 9, 10, 11, 13, 14, 17, 19, 22, 24, 27mm; 1-5" Extension Bar; 1-Air Tool Oil; 1-Hex Wrench; 1-Male Plug; 1-Mini Oiler; 1-Blow Molded Case

*Packing: 6pcs/28.0kg/29.0kg/1.79'

Impact Wrench Model No.	F312-24	F312-26	F323-45	F323-48	
Kit Model No.	F312-248	F312-268	F312-458	F323-488	



GR-68293

W1-13K



F323-458

GREEN AIR TOOLS



GREEN/

F313-329



F313-318



F319-250K



F313-327/328/329

- Die Grinder plus 10 different shank-mounted stones for flexibility to meet different die grinding applications
- Contents: 1-1/4" Air Die Grinder(Mode No. F313-324/325/326);
 - 5-1/4" Shank-mounted Stones; 5-1/8" Shank-mounted Stones;
 - 1-1/8" Collet; 2-Open End Spanners; 1-Nipple; 1-Blow Molded Case *Packing: 10pcs/12.0kg/13.0kg/1.17'

Micro Air Grinder Kit

F313-318

- Die Grinder plus 10 different shank-mounted stones for flexibility to meet different die grinding applications
- Contents: 1- Micro Grinder with 1/8" collet; 8- Grinding Stone 2- Diamond Points; 3- Engraving Cutter; 10- Cut-Off Wheel
 - 2- Sanding Disc; 1- 1/8"Screw Mandrel;5- 3/8"Sanding Drum
 - 1- 3/8"Sanding Band; 1- 1/2"Polishing Wheel; 1- Oiler
 - 2- Oil Bottle; 2- Wrench; 1- 1/4"Female Plug; 1-Blow Molded Case *Packing: 10pcs/11.0kg/12.0kg/1.50'

Air Hammer Kit

F319-115K/119K/250K

- Ideal for muffler and pipe removal, body shop work, shock work, scraping rust, and light front-end work
- Contents: 1-Air Hammer(Model No.:F319-115/119/250); 1-Quick Change Retainer; 4-Round Chisel; 1-Nipple; 1-Oiler; 1-Blow Molded Case
 *Packing: 10pcs/18.0kg/19.0kg/1.02'



3/8" Ratchet Wrench Kit

F320-238

- A complete air ratchet set including 3/8" ratchet wrench, selection of sockets, extensions and driver bits. Supplied in tough storage case
- Contents: 1-3/8" Ratchet Wrench; 4-1/2" Dr. Impact Socket(11, 12, 13, 14mm) 1-Swivel Hose Connector; 1-Male Coupler; 1-3/8" Dr. Screwdriver Bit Holder; 1-3/8" To 1/2" Adaptor; 1-1/2" Dr. 3" Ext. Bar; 4-1/4" Hex. Screwdriver Bits; 1-Blow Molded Case *Packing: 10pcs/23.0kg/24.0kg/1.25'

AIR TOOLS KITS

W2-17K

REEN

w.green-air.com

TOO

Contents: 1-1/2" Impact Wrench; 1-1/2" Air Ratchet;

10-1/2" Drive Impact Socket(9,10,11,13,14,17,19,22,24,27mm); 1-Mini Oiler; 1-Hex Wrench; 1-Oil; 1-Plug; 1-Blow Molded Case *Packing: 4pcs/20.0kg/21.0kg/1.26'

40 PC. Air Tool Kit

17 PC. Air Tool Kit

G1-40K

- Contents: 1-Air Die Grinder; 2-Collet; 1-Safety Guard; 1-Safety Goggles;
 - 2-Cut-off Wheel; 1-Cut-off Tool Shank; 1-(25x10)mm Sanding Drum;
 - 1-(25x25)mm Sanding Drum; 10-Grinding Stone; 1-1/2" Rubber Stem;
 - 1-3/4" Rubber Stem; 5-1/2" Sanding Roll; 5-3/4" Sanding Roll; 1-Foam Stem;
 - 1-Teflon Tape; 1-Oil; 2-Open End Wrench; 1-Hex Wrench; 1-Air Plug;
 - 1-Blow Molded Case
 - *Packing: 4pcs/9.5kg/10.7kg/2.23'



W2-17K

REEI

G1-40K

50 PC. Air Tool Kit

W3-50K

- Contents: 1-1/2"Impact Wrench; 1-3/8"Ratchet Wrench; 5-Air Hammer w/Chisels; 10-Impact Sockets(1/2"to3/4" and 11,12,13,14,17mm);
 - 1-3/8"to 1/2" Adapter; 1-3/8"Dr. 3"Ext.Bar,5-1/4"Male Plugs;
 - 1-Female Coupler; 1-Teflon Tape; 1-Air Gun; 1-Rubber Nozzle;
 - 1-Safety Nozzle; 2-Sport Needle & Adapter; 1-5/32"Allen Wrench;
 - 1-Ball Foot Air Chuck; 1-High Pressure Nozzle; 1-Tapered Nozzle;
 - 2-1/4" to 1/4" Female & Male Hose Connector; 1-Air Tool Oil;
 - 1-1/4" Female Plugs; 1-Blow Mold Case; 1-Swivel Hose Connector; 1-Dual foot Tire Gauge; 1-Dr.Screwdriver Bit Holder; 6-1/4"Hex.Drive Bits; 1-Mini Oiler
 - *Packing: 3pcs/23.0kg/24.0kg/2.26'



W3-50K

50 PC. Air Tool Kit

WG3-50K

- Contents: 1-1/2"Impact Wrench; 1-3/8"Ratchet Wrench; 1-1/4"Die Grinder; 4-1/4" Grinding Stone; 10-Impact Sockets(1/2"to3/4" and 11,12,13,14,17mm); 1-3/8"to 1/2" Adapter; 1-3/8"Dr. 3"Ext.Bar; 5-Male Plugs; 1-Female Coupler; 1-Teflon Tape; 1-Air Gun; 1-Rubber Nozzle; 1-Safety Nozzle; 2-Sport Needle & Adapter; 1-5/32"Allen Wrench; 1-Ball Foot Air Chuck; 1-High Pressure Nozzle; 1-Tapered Nozzle; 1-Air Tool Oil; 2-1/4" to 1/4"Female & Male Hose Connector; 1-1/4"Female Plug;
 - 1-Blow Mold Case; 1-Swivel Hose Connector; 1- Dual foot Tire Gauge;
 - 1-Dr.Screwdriver Bit Holder; 6-1/4"Hex.Drive Bits; 1-Mini Oiler *Packing: 3pcs/21.0kg/22.0kg/2.26/



www.green-air.com

www.green-air.com GREEN

ISO 9001:2000 (E

53 PC. Air Tool Kit

W4-53K



GREEN/

W4-53K

Contents: 1-1/2"Impact Wrench; 1-3/8"Ratchet Wrench; 1-Air Die Grinder;

- 1-Touch Up Spray Gun;1-0.2L Paint Cup; 5-1/2"Impact Sockets;
- 1-3/8"to 1/2" Adapter; 5-1/4"NPTM Plugs; 1-1/4"NPTF Plug;1-Female Coupler;
- 1-Teflon Tape; 1-Air Blow Gun; 1-Rubber Nozzle; 1-Safety Nozzle;
- 2-Sport Needle & Adapter; 1-Hex.Wrench; 1-Ball Foot Air Chuck; 1-High Pressure Nozzle; 1-Tapered Nozzle; 1-1/4" to 1/4"NPTF Connector;
- 1-1/4" to 1/4"NPTM Connector; 1-Air Tool Oil; 1-Blow Molded Case;
- 1-1/8" Collet; 5-1/4" Shank Mounted Stones; 5-1/8" Shank Mounted Stones;
- 1- Dual foot Tire Gauge; 6-1/4"Hex.Drive Bits; 1-1/4"Dr.Screwdriver Bit Holder; 2-Open End Wrench

*Packing: 3pcs/22.0kg/23.0kg/2.26'

89 PC. Air Tool Kit

W4-89K

- W4-89K
- Contents: 1-3/8"Ratchet Wrench; 1-Air Die Grinder; ; 1-1/8"Collet; 1-Touch Up Spray Gun 1-0.2L Paint Cup; 1-1/4"NPTF Coupler; 1-Hex Wrench; 1-1/2" Impact Wrench; 1-1/4"Dr. Screwdriver Bit Holde; 1-3/8"to1/2"Drive Adapter; 6-1/2"Impact Sockets; 5- Spray Gun Cleaner Kit; 1-1/4" Sanding Drum; 1-1/8" Sanding Drum; 5-1/4" Sanding Paper; 5-1/8" Sanding Paper; 1-Airtool Oil; 5-1/4"NPTM Plugs; 1-1/4"NPTF Plug; 1-Tire Gauge; 1-Tire Inflator; 10-Paper Paint Strainer; 10-1/4" Hex. Screwdriver Bit; 1-1/4"to1/4"NPTF Connector; 1-1/4"to1/4"NPTM Connector; 2-Hose Clamps; 1-1/4"Hose Fitting; 1-3/8"Hose Fitting; 1-Blow Gun; 6-Blow Gun Accessories; 5-1/8" Shank Grinding Stone; 5-1/4" Shank Grinding Stone; 1-Teflon Tape; 2-Open End Wrench; 1-Blow Molded Case *Packing: 3pcs/22.5kg/23.5kg/2.26'

AIR TOOLS KITS



61 PC. Air Tool Kit

W4-61K

Contents: 1-1/2"Impact Wrench; 1-3/8" Ratchet Wrench; 1-Air Die Grinder; 1-Air Tire Gauge; 2-3/8"Impact Sockets; 6-1/2"Impact Sockets; 1-3/8"to1/2" Adapter; 1-Air Blow Gun;

- 6-1/4"NPTM Plugs; 2-1/4"NPTF Plugs; 1-1/4"NPTF Coupler; 1-Teflon Tape;
- 1- Dual foot Tire Gauge; 1-Pocket Gauge; 1-Rubber Nozzle; 1-Safety Nozzle;
- 2-Sport Needle; 2-Tapered Nozzle; 1-Hex.Wrench; 1-Ball Foot Air Chuck;
- 2-1/4" to 1/4"NPTF Connector; 2-1/4" to 1/4"NPTM Connector; 1-Air Tool Oil;
- 1-1/8" Collet; 5-1/4" Shank Mounted Stones; 5-1/8" Shank Mounted Stones;
- 1-1/4" Sanding Drum; 1-1/2" Sanding Drum; 3-1/4" Sanding Paper;
- 3-1/2" Sanding Paper; 2-Open End Wrench; 1-Blow Molded Case

8C1-001B

REEN

www.green-air.com

TOO

- Oil-less pump design for durability and no maintenance.
- Built-in automatic thermal overload protection.

Mini Air Compressor

- 1/8"PS outlet male connector.4mm x 6mm x 5m PU hose included.
- Built-in cooling window. Air fans in each side reduce operating temperature
- Four absorptive rubber feet make the operation more smoothly by reducing vibration
- Small volume and light weight for convenient carry. Low noise during operation, quick air flow, secure operation

*Packing: 6pcs/24.0kg/25.0kg/1.86'

	Model	Motor Output	Electrical Supply	Free Speed	Working Pressure		Max.Continued Run Pressure		Free Flow Rate	Automatic Pressure Switch	Net Weight
		hp	V/Hz	rpm	psi	kg/cm ²	psi	kg/cm ²	nl/min		kg
8	BC1-001B	1/8	220/50	1400	36-57	2.5-4.0	100	7.0	20	Available	3.3
8	3C1-002B	1/4	220/50	2800	71-100	5.0-7.0	100	7.0	40	Available	3.3
8	3C1-001A	1/8	110/60	1700	36-57	2.5-4.0	114	8.0	15	Available	3.3
8	8C1-002A	1/4	110/60	3400	71-100	5.0-7.0	100	7.0	40	Available	3.3
_											

Mini Air Compressor With 6L Tank 8C1-002-06B

- Oil-less pump design for durability and no maintenance.
- Built-in automatic thermal overload protection.
- 1/4" NPT male outlet, 6L air tank
- Built-in cooling window. Air fans in each side reduce operating temperature
- Four absorptive rubber feet make the operation more smoothly by reducing vibration
- Small volume and light weight for convenient carry. Low noise during operation, quick air flow, secure operation
 *Packing: 1pcs/8.1kg/9.0kg/1.07'

8C1-002-06BK assembled with truckle and handle bar grip for easy move and carrying

Model	Motor Output	Electrical Supply				Max.Continued Run Pressure		Free Flow Rate	Automatic Pressure Switch	Net Weight
	hp	V/Hz	rpm	psi	kg/cm ²	psi	kg/cm ²	nl/min		kg
8C1-002-06E	1 /4	220/50	2800	71-100	5.0-7.0	100	7.0	40	Available	8.1
8C1-002-06B	K 1/4	220/50	2800	71-100	5.0-7.0	100	7.0	40	Available	9.1



Provide air flow for operating mini and small type of air spray guns.



Supply air power for operating air nailer or stapler.



Designed for use in combination with air blow gun, air chuck, air duster, air recoil hose, etc.



Tankless model is elaborately designed for operating air brush.



REEN



8C1-002-06B



8C1-002-06BK






GREEN GREEN AIR TOOLS

ISO 9001:2000 (€ G



THE BASIC THREAD TYPES









Different plug designs currently used in the automotive market. Interchangeability of pneumatic couplings is determined by plug design.

Industrial/Milton Style Couplers and Plugs

- Popular Body Size: 1/4", 3/8"
- Thread Type: Male, Female, Hose Barb
- Thread Size: 1/4"NPT, 3/8"NPT, 1/4"I.D. Hose Barb, 3/8"I.D. Hose Barb

Tru-Flate Style Couplers and Plugs

Popular Body Size: 1/4", 3/8"

AIR COUPLERS & PLU

- Thread Type: Male, Female, Hose Barb
- Thread Size: 1/4"NPT, 3/8"NPT, 1/2"NPT, 1/4"I.D. Hose Barb, 3/8"I.D. Hose Barb

ARO Style Couplers and Plugs

- Popular Body Size: 1/4"
- Thread Type: Male, Female, Hose Barb
- Thread Size: 1/4"NPT, 1/4"I.D. Hose Barb



- Popular Body Size: 1/4"
- Thread Type: Male, Female
- Thread Size: 1/4"NPT

Orion Style Couplers and Plugs

- Popular Body Size: 1/4"
- Thread Type: Male, Female, Hose Barb
- Thread Size: 1/4"NPT



Universal Couplers

one coupler fits the three most popular air line plugs. This coupler can be used with Tru-Flate, Industrial/Milton and Aro



Design plugs. It eliminates confusion among designs. Quality, deluxe "push to connect" style makes coupling quick and easy. Heavy duty metal construction means longer life. Unique tubular valve construction allows greater air flow

- Popular Body Size: 1/4"
- Thread Type: Male, Female, Hose Barb
- Thread Size: 1/4"NPT, 3/8"NPT

one coupler fits the three most popular air line plugs. This couplercan be used with Tru-Flate, Industrial/Milton and



Orion Design plugs. It eliminates confusion among designs. Quality, deluxe "push to connect" style makes coupling quick and easy.

- Popular Body Size: 1/4"
- Thread Type: Male, Female, Hose Barb
- Thread Size: 1/4"NPT, 3/8"NPT

Nitto Style Couplers and Plugs

- Popular Body Size: 1/4",
- Thread Type: Male, Female, Hose Barb, Lock-on Hose
- Thread Size: 1/4"NPT, 3/8"NPT, 1/2"NPT, 1/4" / 3/8" / 5/16" / 1/2"I.D. Hose Barb

Nitto Style One Touch Couplers



www.green-air.com



- Constructed of heavy duty, corrosion resistant steel. Durable 8-ball locking mechanism and nitrile seals for secure, leak-free connection. Use on a variety of equipment for quick and easy connections without threading. Use anywhere water hoses are connected and disconnected frequently.
- 3/8" Body x 9/32" Hose Barb

ISO 9001:2000 (E 🔂

High Pressure Water Hose Coupler / Plug Sets

- · For quick and easy change out of pressure washer hoses, guns, and accessories
- Body Size: 1/4", 3/8"
- Thread Type: Male, Female
- Thread Size: 1/4"NPT, 3/8"NPT



Male Hose End

1/8" NPT Male x 1/4" Hose I.D. 1/4" NPT Male x 1/4" Hose I.D. 1/4" NPT Male x 5/16" Hose I.D. 1/4" NPT Male x 3/8" Hose I.D. 3/8" NPT Male x 3/8" Hose I.D.



1/4" NPT Female x 1/4" Hose I.D. 1/4" NPT Female x 5/16" Hose I.D. 1/4" NPT Female x 3/8" Hose I.D. 3/8" NPT Female x 3/8" Hose I.D.

Pipe Coupling and Adapters

Male Coupling

1/4" NPT Male x 1/4" NPT Male 3/8" NPT Male x 3/8" NPT Male

Female Bushing

1/8" NPT Female x 1/4" NPT Male 1/4" NPT Female x 3/8" NPT Male 3/8" NPT Female x 1/2" NPT Male

T-Style Fittings

Female-Female x Female 1/4"NPT-1/4"NPT x 1/4"NPT Male-Male x Male 1/4"NPT-1/4"NPT x 1/4"NPT

Hose Barb-Hose Barb x Hose Barb 1/4"H-1/4"H x 1/4"H 3/8"H-3/8"H x 3/8"H







19-FM

20-T-MMM

Т-ННН

20.



1/4" NPT Female x 1/4" NPT Female

3/8" NPT Female x 3/8" NPT Female

Female Swivel Hose End

1/4" NPT Female x 1/4" Hose I.D.

1/4" NPT Female x 3/8" Hose I.D.

3/8" NPT Female x 3/8" Hose I.D.

Hose Splicer

1/4" Hose I.D.

5/16" Hose I.D.

3/8" Hose I.D.

1/2" Hose I.D.

Female Coupling

Plug 1/4" NPT Male 3/8" NPT Male

Male-Female x Female 1/4"NPT-1/4"NPT x 1/4"NPT

Male-Hose Barb x Hose Barb 1/4"NPT-3/8"H x 3/8"H



19-FF





JT-PWC-CF

JT-GHC-CH

JT-GHC-PH

JT-PWC-PF

18-SH

18-HH

19-MF

19-PM





18-MH





GREEN GREEN AIR TOOLS

Three-In-One Air Line Manifold SMY-U



Supply three air tools from one source! Use on air hose end or as permanently fixed bench outlet. No need to disconnect/connect to use different tools. Three 1/4" NPT outlets and single 1/4" NPT inlet make this a useful shop or bench accessory.

Air Line Swivel Fittings

Z-Swivel Connector

1/4"NPT F x 1/4"NPT M



Eliminates kinked and twisted air line hose by swiveling a full 360°. Use on air lines, tools, and compressor connections to increase flexibility and convenience.

Full Swivel Connector

CG-2

Rubber sleeve protects against dust Fit any style design coupler, female, male, hose.



Z-Swivel Connector /Regulator

Fitted with air valve for extra control over speed of power tool 1/4"NPT F x 1/4"NPT M

SW-002G

In-Line Tool Filter

Z-Swivel Connector /Pressure Gauge

Fitted with air valve for extra control over speed of power tool 0-140psi Air Pressure 1/4"NPT F x 1/4"NPT M

CW-2

F420-125A

In-Line Tool Oiler



A compact oiler that fastens directly to the air tool. Precisely meters proper amount of oil to the tool only when the tool is in use. No adjustments necessary. 1/4" male NPT outlet, 1/4" female NPT inlet. Use on all air impact guns, air wrenches, body shop air tools requiring 1/4" air lines. *Packing: 100pcs/9.0kg/10.0kg/1.44'

In-Line Air Flow Regulator



· Controls in-line air pressure for paint spray guns or other pneumatic tools

- · Helps keep air flow at exact operating pressures
- · Use where precise air flow is desired Pressure Gauge 0-200 PSI

F420-125R F420-125M

Air Lubricator


F420-325B

- · Oil mist lubricator fitted with feed control for fine control of oil/air mix.
 - · Die cast control head with clear polycarbonate bowl
 - 1/4" female NPT ports
 - *Packing: 20pcs/12.0kg/13.0kg/1.15/



A compact and extremely effective accessory for all air-operated shop tools and equipment, such as inflator gauges, impact wrenches, spray guns, airpowered sanders, etc. Protects them against rust, pipe scale and dirt. 1/4" female NPT inlet, 1/4" male NPT outle *Packing: 100pcs/9.0kg/10.0kg/2.37/

Mini Air Filters



- 5 micron element provides maximum filtration
- · Screw-on bowl with manual drain
- · 21 SCFM flow capacity at 90 PSI
- 1/4" NPT(F) ports

Filter/Regulator With Gauge F420-325A

- · Commonly used for regulating and filtering air supply at workstation
- · Polycarbonate bowl fitted with protective cage and automatic drain control
- Supplied with pressure gauge
- Pressure Range: 0-160psi
- 1/4" female NPT ports
- *Packing: 20pcs/17.0kg/18.0kg/1.47/

www.green-air.com

AIR LINE ACCESSOR









*Packing: 20pcs/17.0kg/18.0kg/2.30/

BLOW GUN ACCESSORIES



BLOW GUN ACCESSORI



Trigger controls airflow to gun tip

KS-10S

- Star tip prevents dangerous pressure buildup and is very quiet
- Brass inlet and valve
- · Comfortable, lightweight design
- 1/4" female NPT inlet
- Packing: 100pcs/8.0kg/9.0kg/1.15'

Siphon Spray Gun

BG-220

- · Blows air/liquids
- · Excellent for cleaning engines
- Complete with 8 feet plastic tubing
- 1/4" female NPT inlet
- *Packing: 20pcs/16.0kg/17.0kg/1.80'

www.green-air.com AIR TOOLS EEN



Tire Pressure Gauges

Pocket Tire Gauge

- · Use for passenger cars, vans and light trucks
- Calibrated 2 sides, 5-50psi in 1psi
- · Nylon indicator bar
- *Packing: 240pcs/9.0kg/10.0kg/3.08/

Dual Foot Gauge

TG-6

TG-2

- · Ideal for dual wheels and other difficult to reach valves on pickups, recreational vehicles (RV), heavy trucks and off-road equipment
- · Chrome plated brass with a die cast chuck
- · Complete with handy hang-up hook
- Calibrated10-150psi in 2 psi
- *Packing: 80pcs/16.0kg/17.0kg/1.95'

Straight-On Dual Foot Gauge TG-7

- · Designed for the difficult-to-reach inner dual
- Straight-On chuck for inside wheel and 30° reverse angle for outside wheel
- Calibrated10-150psi in 2 psi
- *Packing: 80pcs/16.0kg/17.0kg/1.95/



Air Chucks

Dual Foot Chuck

- · Extended chuck for hard-to-reach valves on tractors, trucks or buses
- · Angled head can inflate either side
- 1/4" Female NPT inlet

Straight-On Dual Foot Chuck TC-6

- · Extended chuck for hard-to-reach valves on tractors, trucks or buses
- Straight-on chuck for inside wheel and 30° reverse angle for outside wheel
- 1/4" Female NPT Inlet

9" Dual Foot Chuck

- · Extended chuck for hard-to-reach valves on tractors, trucks or buses
- Straight-on chuck for inside wheel and 30º reverse angle for outside wheel
- Rubber grip handle provides comfort during use
- 1/4" Female NPT Inlet **Dual Foot Chuck**

AT-10

TC-6L

TC-1

- Extended chuck for high pressure tires on bicycles, motorcycles, mini-bikes, scooters and other cycles
- Vertical head can inflate either side
- 1/4" Female NPT Inlett







www.green-air.com GREEN AIR TOOL

TG-3



21

REEN AIR TOOLS

Heavy Duty Inflator Gauge

- · Use on motor homes and other vehicles with smaller dual wheels
- 10-120 PSI gauge, calibrated in 2 PSI increments
- · Built-in relief valve to reduce pressure in over inflated tires and to zero gauge
- Includes 12" rubber hose

ISO 9001:2000 (E

- Thread Size: 1/4" Female NPT
- TG-101D Dual Foot Chuck Inflator *Packing: 30pcs/16.5kg/17.5kg/1.07/
- TG-101DS Dual Foot Straight Chuck Inflator *Packing: 30pcs/18.0kg/19.0kg/0.87'
- TG-101S Straight-On Tapered Chuck Inflator
- TG-101V 36" Hose with Ball Foot Lock-On Chuck. with Bleed Valve *Packing: 30pcs/27.0kg/28.0kg/1.72'

Standard Style Inflator Gauge

- · Chrome plated castings with brass internal parts for long life
- Solid brass bar is calibrated 10-90 PSI in 2 PSI increments
- Includes 12" rubber hose
- Thread Size: 1/4" Female NPT

TG-151S Straight-On Tapered Chuck Inflator *Packing: 40pcs/22.0kg/23.0kg/1.13' TG-151D Dual Foot Chuck Inflator

Dual Foot Chuck Inflator *Packing: 45pcs/19.0kg/20.0kg/1.26'

Deluxe Inflator Gauge

- Rugged zinc casting, with rubber bumper guard to protect against damage if dropped.
- · Easy to read recessed sight glass
- · Replaceable valve assembly and gauging cartridge
- Calibrated 10-120 PSI in 2 PSI increments
- Includes 12" rubber hose
- Thread Size: 1/4" Female NPT

```
TG-108D Dual Foot Chuck Inflator
*Packing: 30pcs/17.0kg/18.0kg/1.95'
```

- TG-108S Straight-On Tapered Chuck Inflator TG-108B Ball Foot Chuck Inflator
- TG-108V 36" Hose with Straight-On Dual Foot Chuck. with Bleed Valve *Packing: 30pcs/39.0kg/40.0kg/5.54'





G-101D







16PC. Accessory Kit

Contents:

3-1/4"NPT Male Industrial Plugs 1-1/4"NPT Female Industrial Plug 2-1/4"NPT Female Universal Couplers 1-1/4" Inline Ball Valve 1-360^o Swivel Connector 1-3/8" x 1/4"Female Adapter 1-3/8" Male x 1/4" Female Adapter 1-1/4" Female T-Connector 1-1/4" Male Plug 1-1/4" x 1/4" Male Connector 1-1/4" x 1/4" Female Connector 1-Teflon Tape 1-3/8" x 15ft. Coil Air Hose *Packing: 16pcs/15.0kg/16.0kg/5.50'




ACC-20


20PC. Accessory Kit

Contents:

- 3-1/4"NPT Male Industrial Plugs
- 2-1/4"NPT Female Industrial Plug
- 2-1/4"NPT Female Universal Couplers
- 1-Dual Air Chcuk
- 1-Tire Gauge
- 1-Air Blow Gun
- 1-Blow Gun Nozzle
- 1-Blow Gun Adapter
- 1-Blow Gun Safety Nozzle
- 2-Inflation Needles
- 1-Blow Gun Tapered Nozzle
- 1-1/4" x 1/4" Male Connector
- 1-1/4" x 1/4" Female Connector
- 1-Teflon Tape 1-1/4" x 25ft. Coil Air Hose
- *Packing: 3pcs/2.70kg/3.20kg/0.95'

Variety of air line accessory kits and designs are available

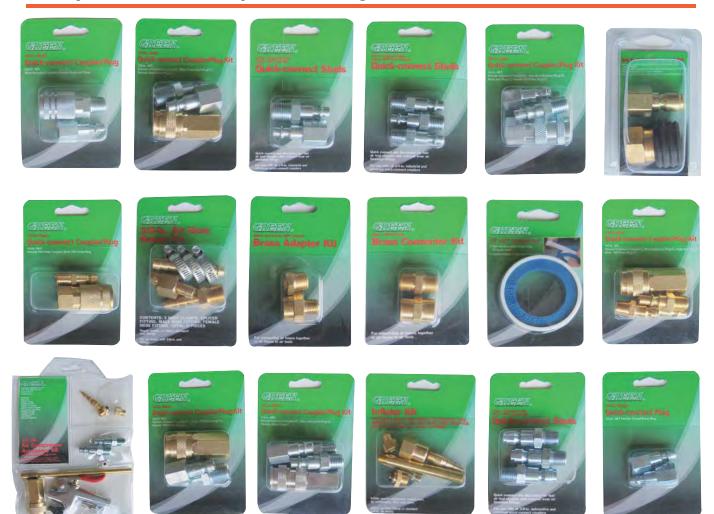

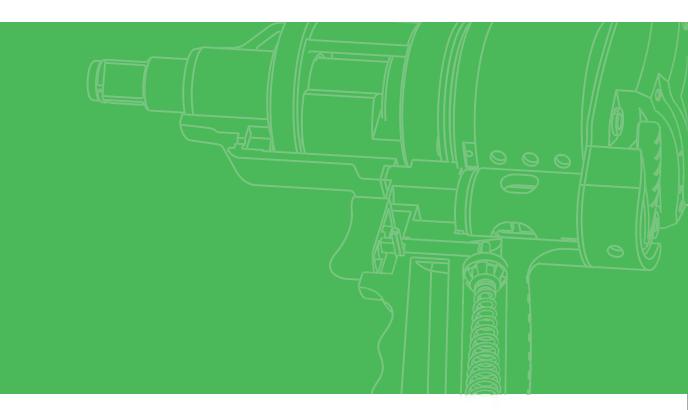

GREEN POWER HARDWARE TOOLS GROUP

FUZHOU FUSHAN PNEUMATIC CO., LTD.

Add: No. Liangang Road, Dongbian Village, Guantou Town, Lianjiang, Fuzhou, Fujian China(350501)
Tel: (+86)591-38186654 Fax: (+86)591-38186611
E-mail: greenair@green-air.com
http: //www.green-air.com

SHANGHAI GREEN POWER TOOLS INDUSTRIAL CO., LTD. SHANGHAI GREEN LINKS IMPORT EXPORT CO.

Add.: No. 668 Zhongde Road, Xiaokunshan, Songjiang, Shanghai, China(201614) Tel: (+86)21-33529155 Fax: (+86)21-33529352

GREEN-TWT CO., LTD.

Add: NO. 26 Daxin Street, Sun-hua Chen, Tainan Hsien, Taiwan (74104) Tel: (+886)6-5838619 Fax: (+886)6-5851570